

Make
a date
with
CAPRI!



Capri's a car you quickly fall in love with—sleek and exciting, built for action. A perfect choice for the man (or woman), with an urge for romantic motoring. Devastatingly good-looking. Wide doors open up a vista of luxurious upholstery. You relax behind a conveniently small wheel, instruments dead ahead of you. Finger-tips control direction indicators, horn, instant headlamp flashers.


CAPRI CONSUL CAPRI CONSUL




Easily adjusted individual front seat brings hands and feet comfortably into range of controls. Ignition, choke, handbrake, push/pull lighting switch, combined windscreen wiper & washer knob, heater & demister controls and cigar lighter have been designed and positioned for maximum comfort and safety. Brake pedal depressed activates quick-acting front discs, bringing the Capri safely and surely to a halt. Foot on clutch, and one of four forward synchromesh gears can be smoothly selected with easy precision.

With throttle wide open Capri leaps forward. 64 thoroughbred horses pulling only 18 cwt. (800 kg.) means pace. 60 (96.5 kph.) flashes past in less than 20 seconds, and Capri rushes on into the eighties (130 kph.). This is the part you really enjoy, the smooth silent 5-bearing crankshaft thrust that only Capri can give. At speed you feel completely in command—and you are! Capri becomes an extension of yourself, follows your commands precisely, instinctively. This is the way to enjoy motoring.

CONSUL CAPRI CONSUL CAPRI CONSUL

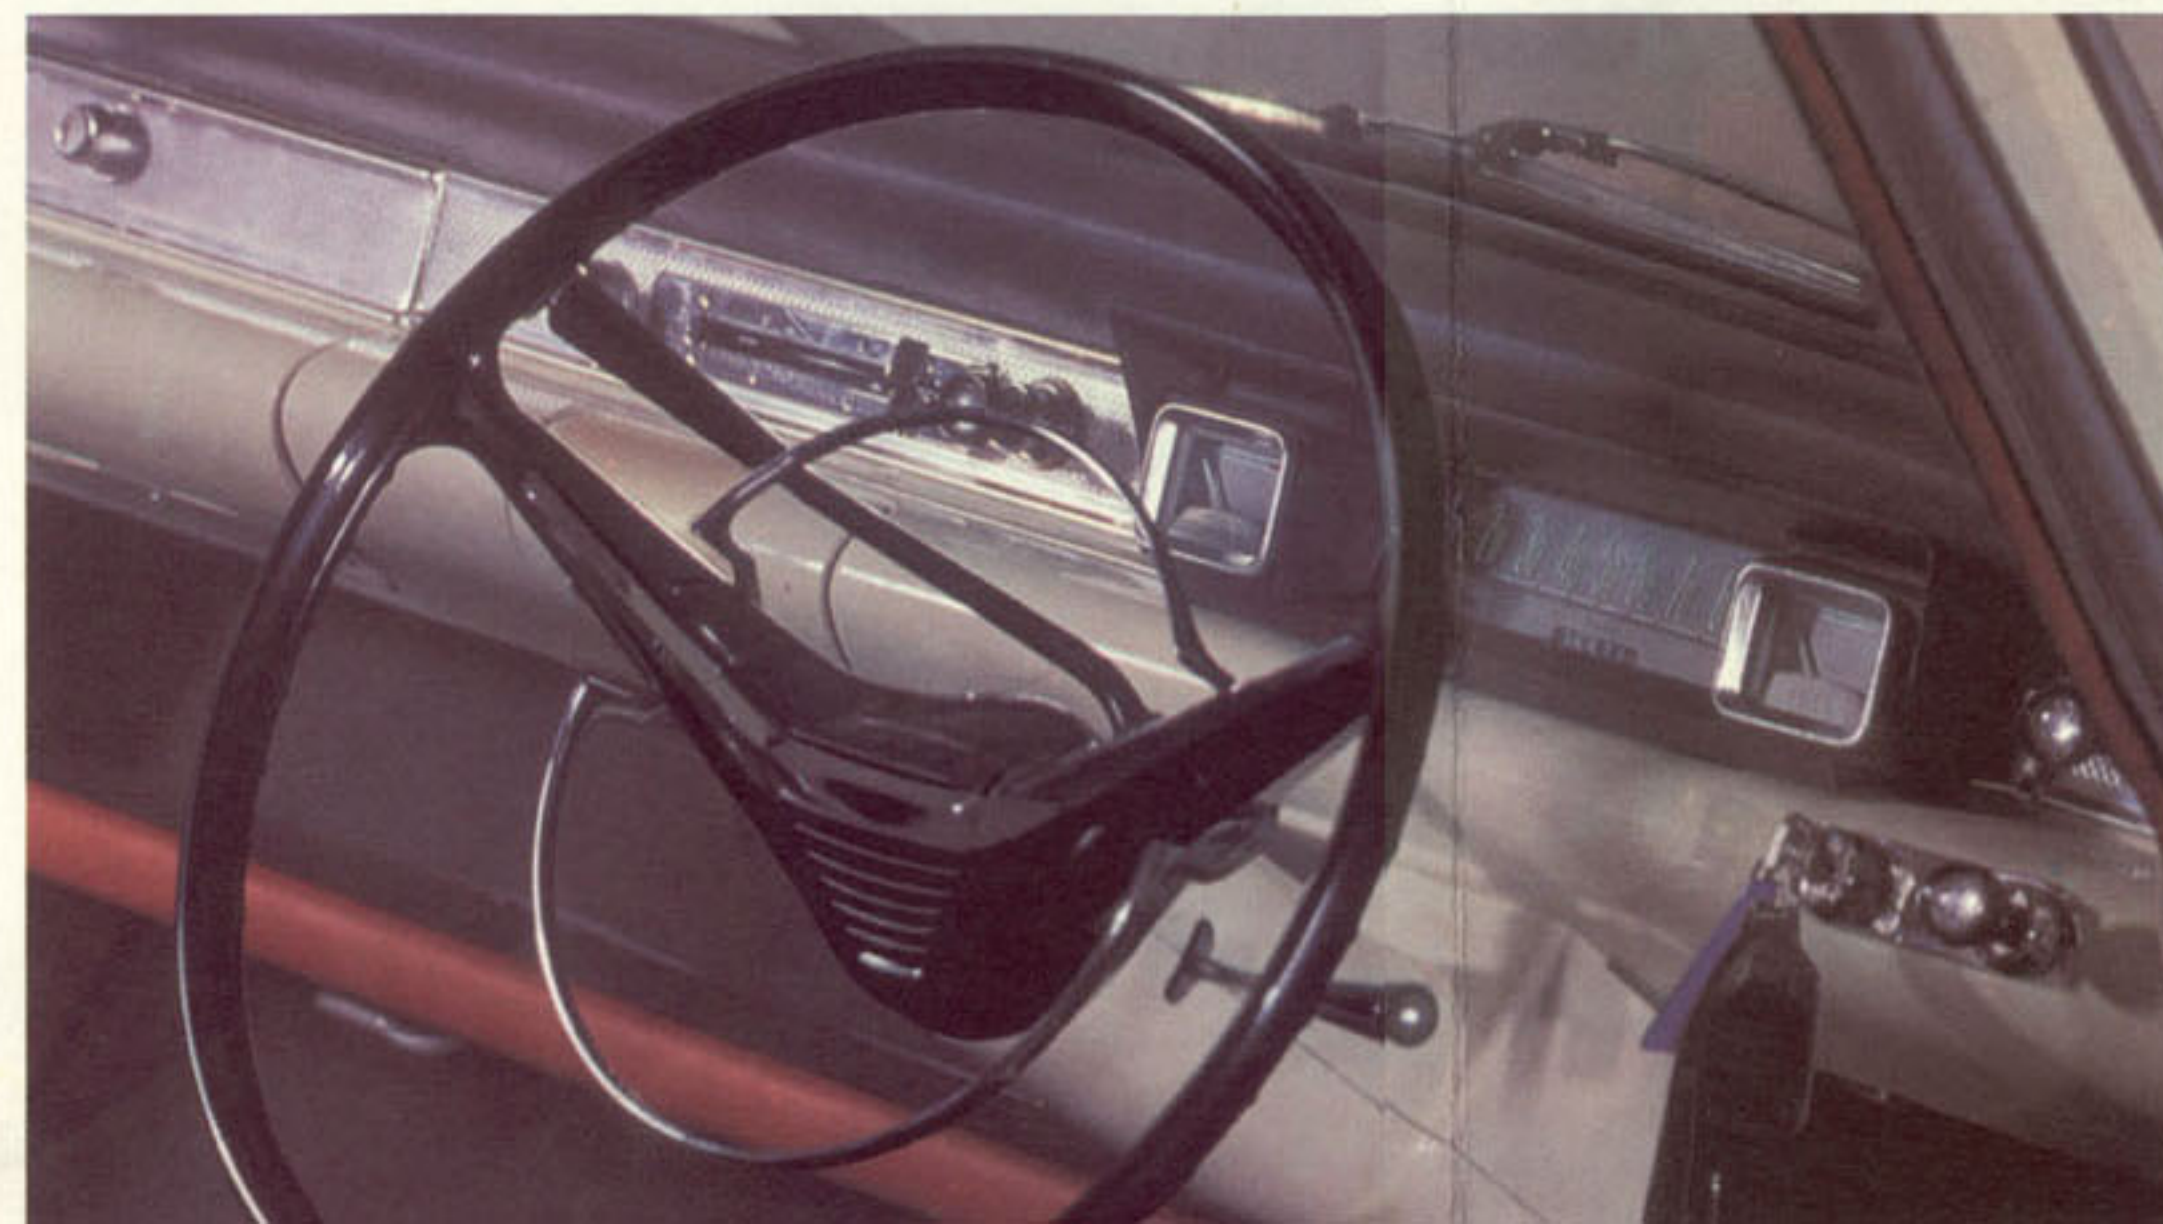

This then is Capri. Day or night, town or country, the unequalled personal car. Relaxes gently in traffic, strides ahead on the motorway. Manoeuvres gracefully, in crowded streets, corners lithely on the open road. Capri is a companion you'll grow to love as one fleeting mile succeeds another.

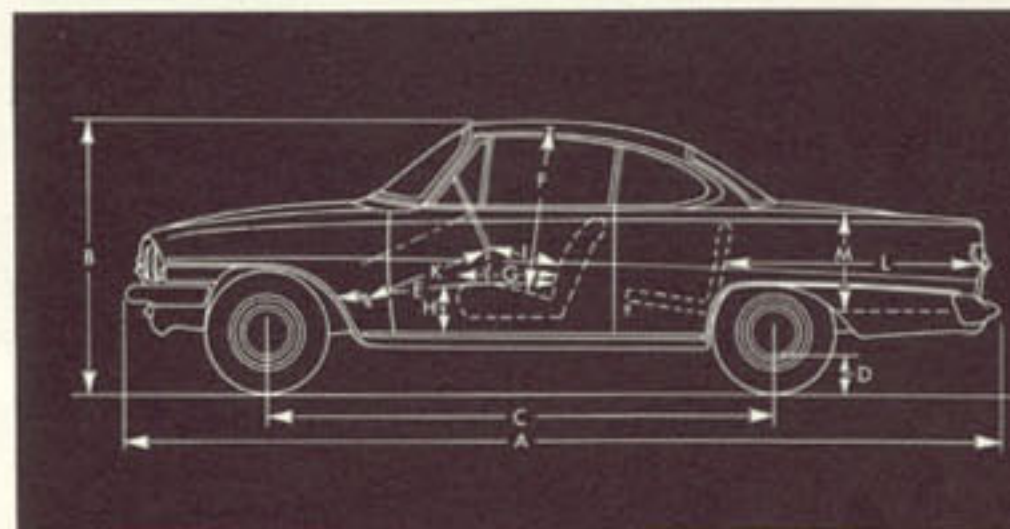


DIMENSIONS

A Overall length	433.76 cm	14' 2 1/2"
B Overall height	133.3 cm	4' 4 1/2"
■ Overall width	165.61 cm	5' 5 1/2"
C Wheelbase	251.6 cm	8' 3"
D Ground clearance	16.8 cm	6 1/2"
E Leg room	117.7 cm	3' 11 1/2"
F Head room	93.65 cm	2' 9 1/2"
■ Hip room	133.3 cm	4' 4 1/2"
G Shoulder room	124.2 cm	4' 0 1/2"
H Seat depth	49.2 cm	1' 7 1/2"
I Cushion from floor	23.2 cm	9 1/2"
J Steering wheel/front squab	34.3 cm	1' 1 1/2"
K Cushion/steering wheel	16.0 cm	6"
L Pedals/steering wheel	66.9 cm	2' 2 1/2"
M Luggage compartment/length	125.7 cm	4' 1 1/2"
N Luggage compartment/height	50.8 cm	1' 8"
■ Luggage compartment/width	134.6 cm	4' 5"

Gear shift is tailored to your needs—slick column shift or ultra quick floor lever. A full-width parcel tray takes maps, scented scarves, cigarettes, casual odds and ends. Cameras and the like are best hidden in the lockable glove box. Behind the seats there's space for the occasional guest or soft luggage and other things. . . . And, around you, an acre of glass for the outward view, inward admiration, with a safety no-crazing zone ahead of the driver.

● Then there's that famous 22 cubic feet (623 cu. metres) of boot. Spring-loaded lid rises swiftly to reveal space enough for any holiday luggage, beach chairs, beach balls . . . spare wheel is neatly tucked away to clear the floor space.

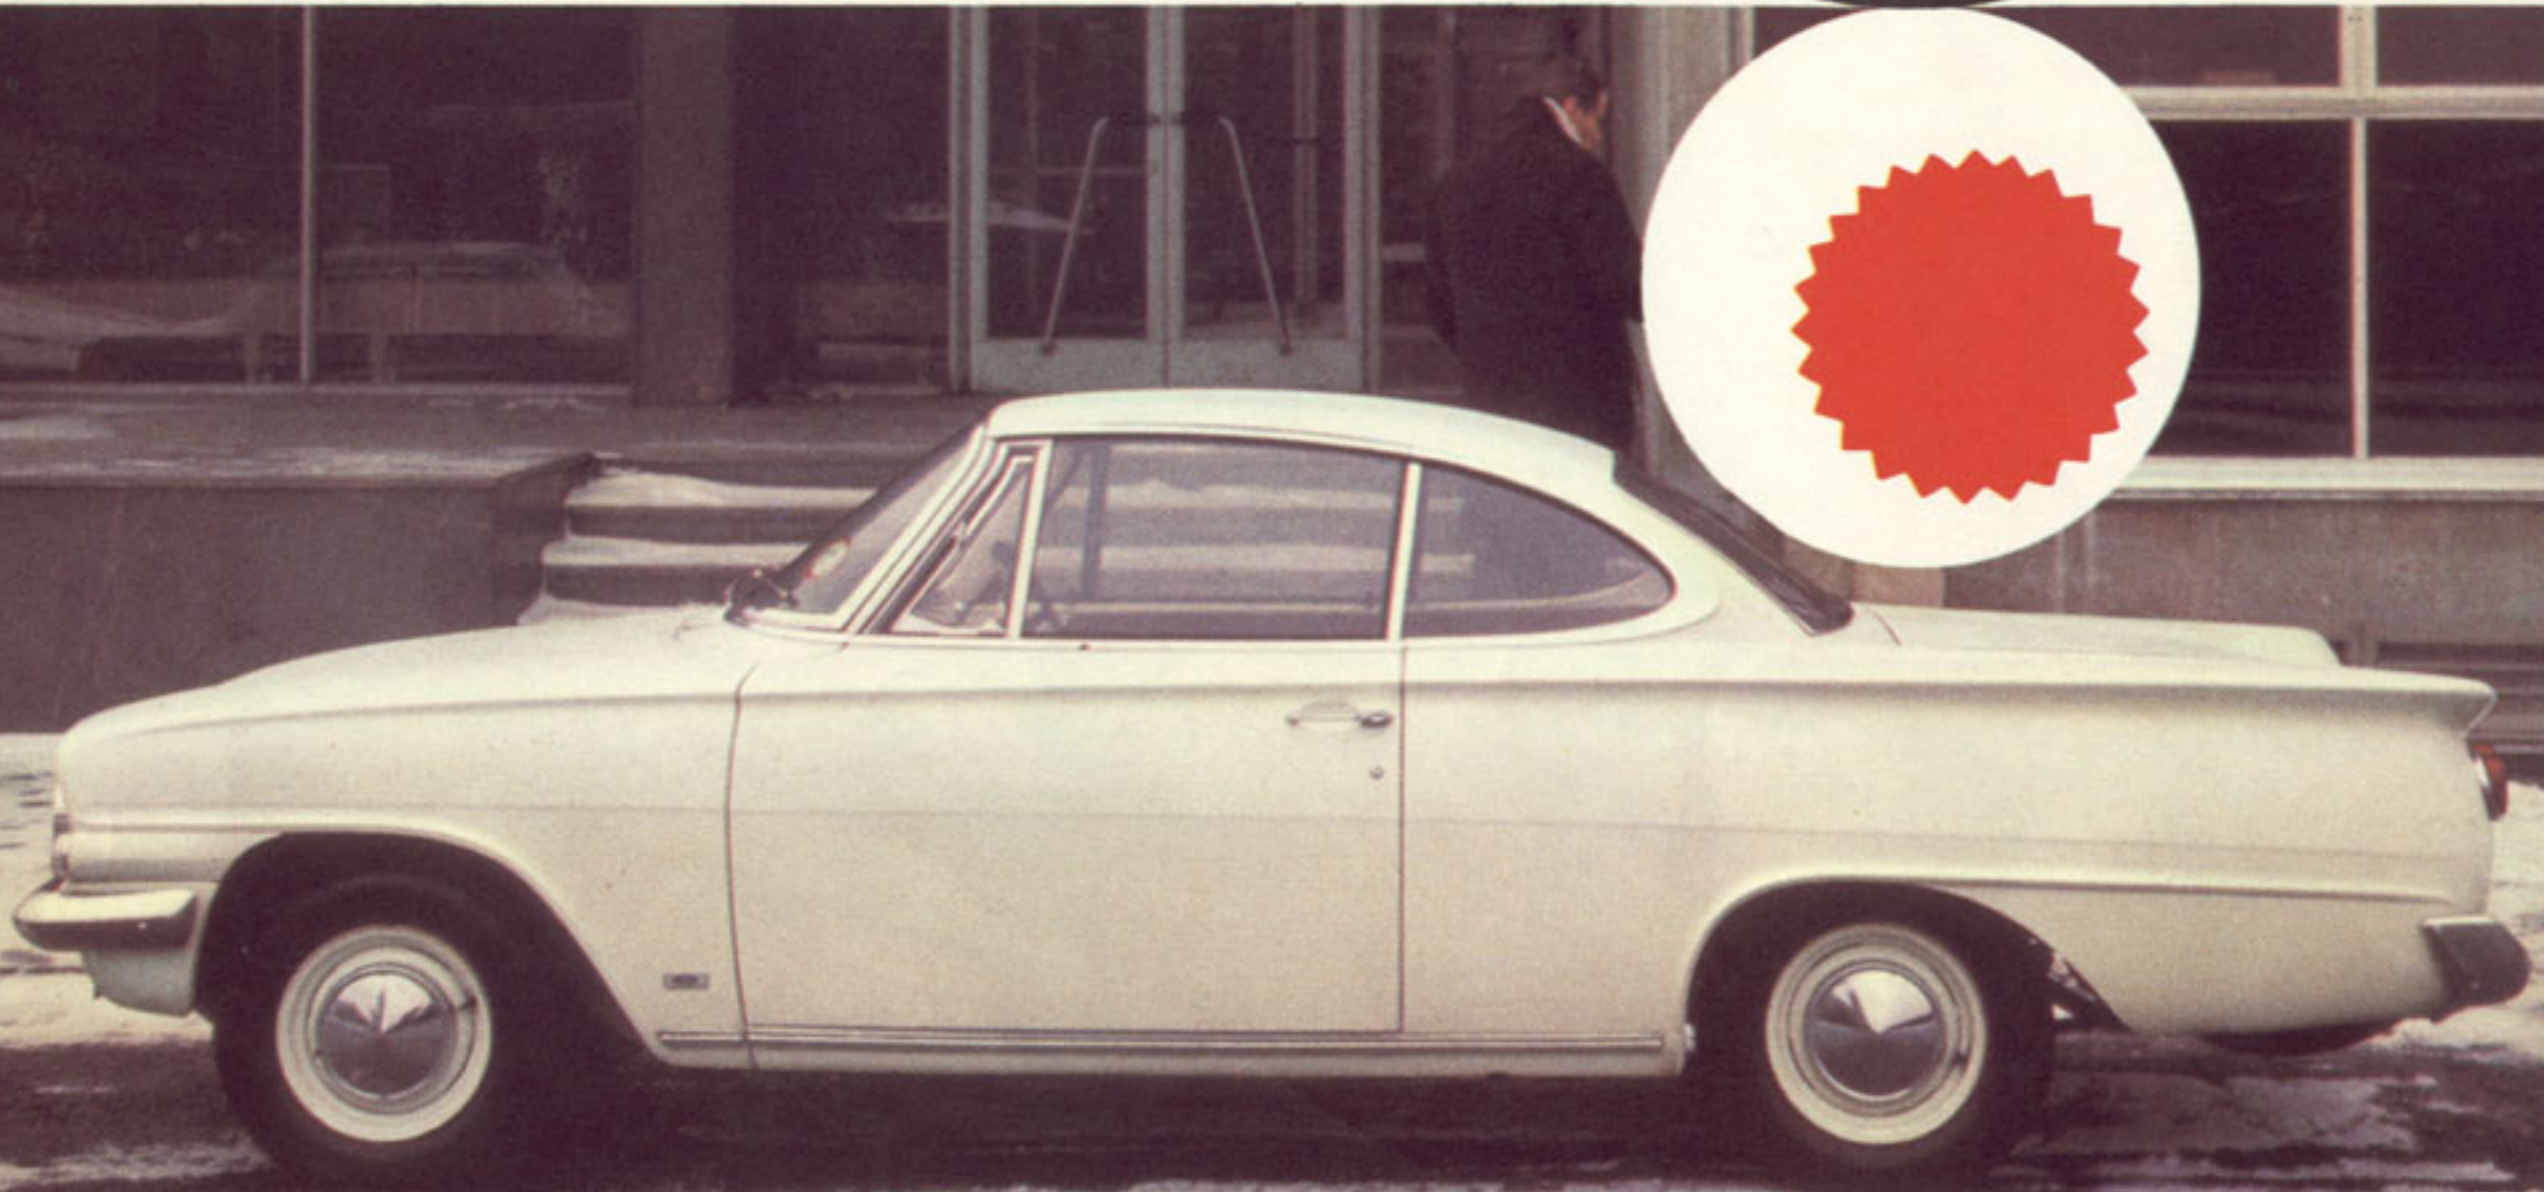

SPECIFICATION

ENGINE: Four cylinder. Bore 3.1878 in. (80.97 mm.). Stroke 2.864 in. (72.75 mm.). Capacity 91.4 cu.in. (1498 cc.). Overhead valves—compression ratio 8.3 to 1. B.h.p. 64 at 4,600 r.p.m. gross, 59.5 at 4,600 r.p.m. nett. Torque 85.5 lbs./ft. r.p.m. at 2,300 gross, 81.5 lbs./ft. r.p.m. at 2,300 nett. Five bearing crankshaft. Fully machined combustion chambers. Separate inlet and exhaust port to each cylinder. Three ring pistons. Chain driven camshaft carried in babbitt lined bearings with mechanical tensioner.

ENGINE LUBRICATION: High efficiency pump externally mounted with full pressure feed. Full flow externally mounted oil filter. Capacity of system 6½ pints (4.25 litres).

IGNITION: 12-volt oil-filled coil.

FUEL SYSTEM: Camshaft-operated mechanical diaphragm pump. Electrical petrol gauge. Tank capacity 9 gallons (40.914 litres approx.).

COOLING SYSTEM: Pressurized. Capacity of system 10½ pints (6.643 litres).

TRANSMISSION: Clutch—single dry plate, spring cushioned. Central floor or column gear change. Four forward gears and reverse with synchromesh on all forward gears. Overall ratios: 1st, 14.615 to 1; 2nd, 9.884 to 1; 3rd, 5.825 to 1; Top, 4.125 to 1; Reverse, 16.347 to 1.

REAR AXLE: Semi-floating. Hypoid final drive. Axle ratio 4.125 to 1.

FRONT SUSPENSION: Independent front wheel suspension.

REAR SUSPENSION: Semi-elliptical springs with hydraulic double-acting lever type shock absorbers.

BRAKES: Front—disc brakes. Rear—drum brakes.

STEERING: High efficiency recirculatory ball type; ratio 15.88 to 1. Turning circle 34 ft (5,192 metres).

WHEELS and TYRES: Pressed steel with base rims. Tyres 5.60 x 13 ins. 4-ply tubeless.

ELECTRICAL EQUIPMENT: Two-brush ventilated generator. Starter motor. Battery 12-volt, 38 amp./hr. at 20-hour rate. Dual horns.

INSTRUMENTS: Conveniently grouped hooded cluster immediately in front of driver includes: speedometer, odometer, fuel gauge, temperature gauge, ignition and oil pressure warning lights. Direction indicator tell-tale lights. Main beam warning light. Variable instrument lighting.

CONTROLS: Mounted on the top half of facia panel, controls are as follows: choke, windscreen wiper (incorporating windscreen washer), key-operated ignition/starter switch, combined instrument/side/headlamp lighting switch. Foot-operated headlamp dipper switch. Fresh air ventilator control (and heater controls when fitted).

BODY: All-steel welded integral construction, safety glass all round. Wind down rear quarter windows. Safety locking knobs incorporated on doors. 22 cu. ft. (0.616 m³) boot (housing spare wheel). Adjustable individual front seats. Rear occasional seat.

GENERAL EQUIPMENT: Variable speed electric windscreen wipers. Four sealed beam headlamps. Twin tail and stop lamps. Twin reflectors. Rear number plate illumination lamp. Flasher type direction indicators with self-cancelling arm on steering column—headlamp flasher switch located on end of indicator arm. Ash tray. Interior rear view mirror. Bright metal exterior and interior ornamentation. Fully styled padded door armrests incorporating remote door release handle. De luxe seating with two-tone PVC upholstery. Two-tone Hide/PVC upholstery optional at extra cost. Two-tone door trim. Single or two-tone body colours. Steering column gear change optional. Carpet floor covering. Windscreen washers. Cigar lighter. Twin horns. Chrome horn ring. Coat hooks. Door operated courtesy light. Provision for fitting heater and radio.

OPTIONAL EQUIPMENT (at extra cost): Heater & Demister, white sidewall tyres.

ACCESSORIES: Available from all Ford Dealers. Ford-approved and fully guaranteed.

Ford policy is one of continuous improvement. The right to change prices, specifications and equipment at any time without notice is reserved.

